HEAD

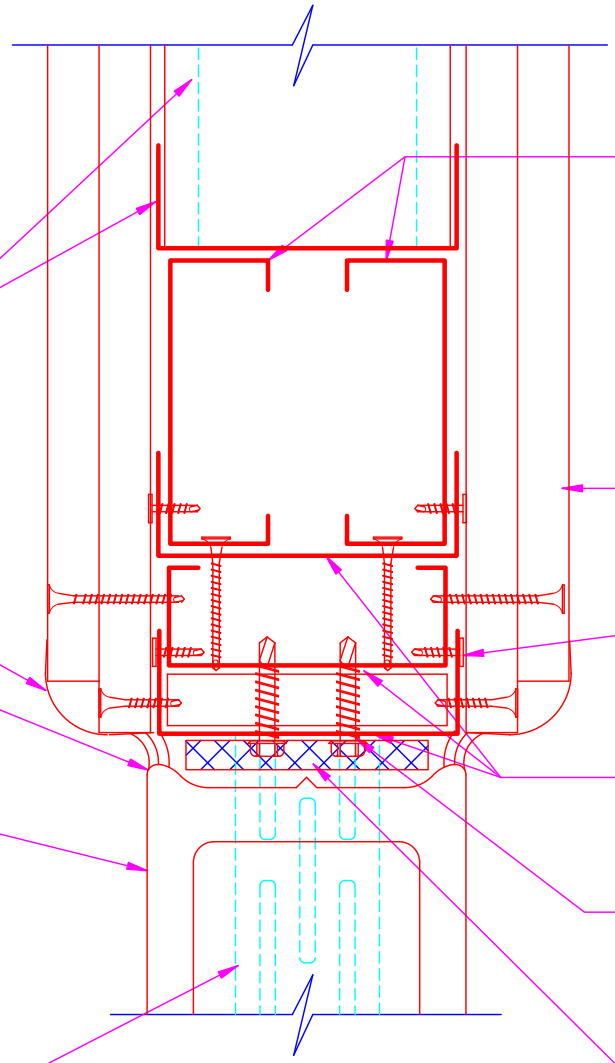

3-5/8" X 25 GAUGE STUDS AND RUNNER CHANNELS

SUGGESTED CORNER TRIM - CORNER BEAD SLOC (3/4"R) BY BEADEX

PAINT GRADE SEALANT

45 OR 60 MINUTE FIRE RATED GLASS BLOCK

1-3/4" X 20 GAUGE ANCHOR AT EVERY OTHER VERTICAL JOINT AND EXTENDING TO SECOND HORIZONTAL JOINT DOWN

(2) 3-5/8" X 20 GAUGE STUDS FOR FIRE TEST. STEEL STUDS/ JOISTS SIZED FOR DESIGN LOAD AND FOR DEFLECTION LIMIT OF L/360

(2) LAYERS 5/8" FIRE CODE 'C' CORE GYPSUM PANEL

5/8" TYPE 'S-12' LOW PROFILE HEAD AT 12" O.C.

3-5/8" X 20 GAUGE STUD AND (2) RUNNER CHANNELS

1-1/4" S-4 HEX WASHER HEAD WITH ANTI-CORROSIVE COATING

3/8" SPACE FILLED WITH COM- PRESSIBLE GLASS FIBER